
How to open the electronics drawer

Important notes:


1. Before opening the electronics drawer, make sure to switch off the power to the machine.
2. Remove the power cord from the power socket.
3. Remove the ethernet cable from the ethernet socket.



On the above image the green arrows indicate the 2 screws which have to be removed.

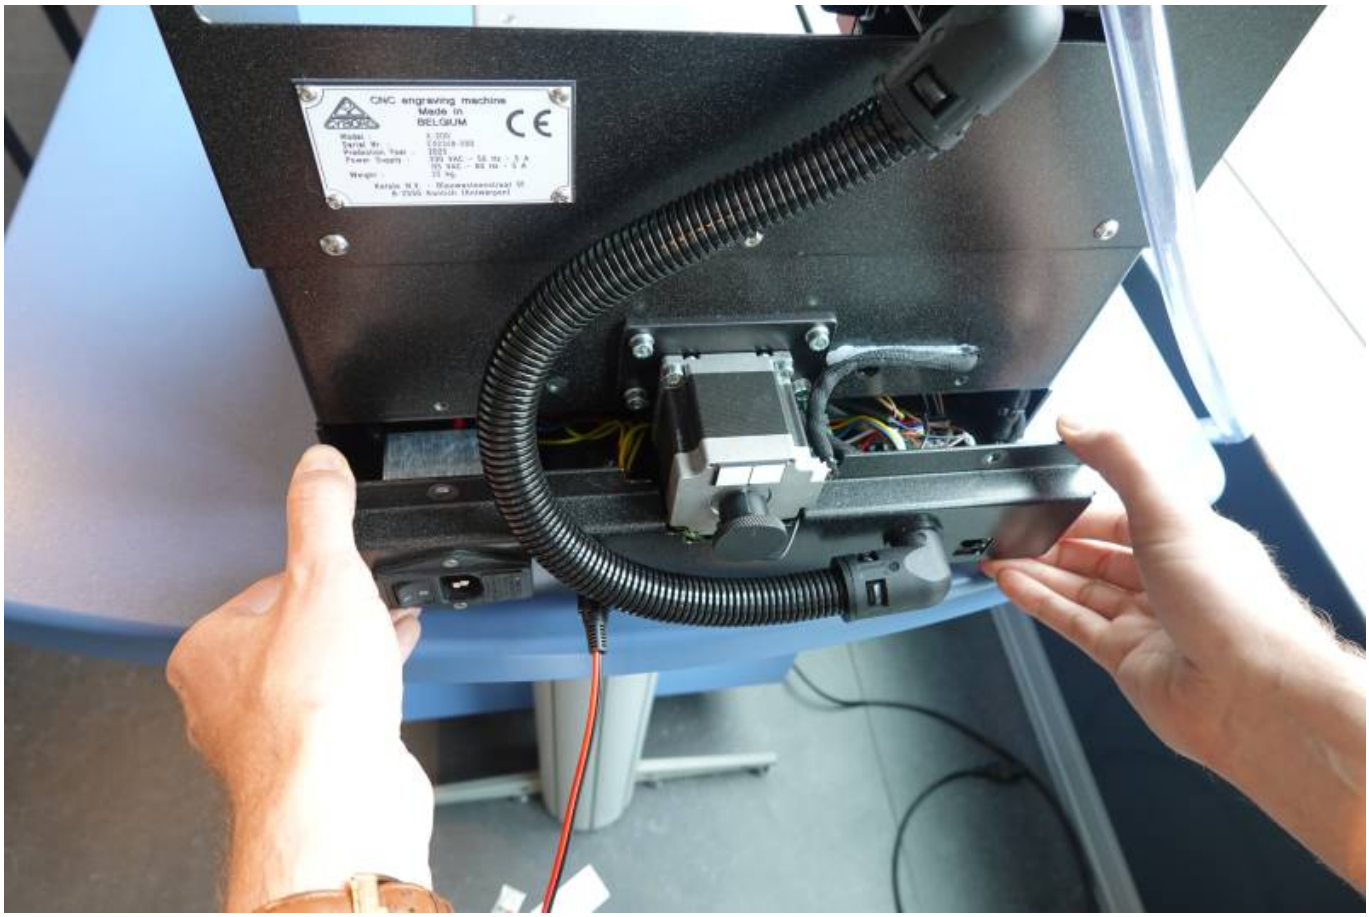

Gently pull the drawer to the rear.
When you encounter a resistance push the 2 sides down and pull further backwards.

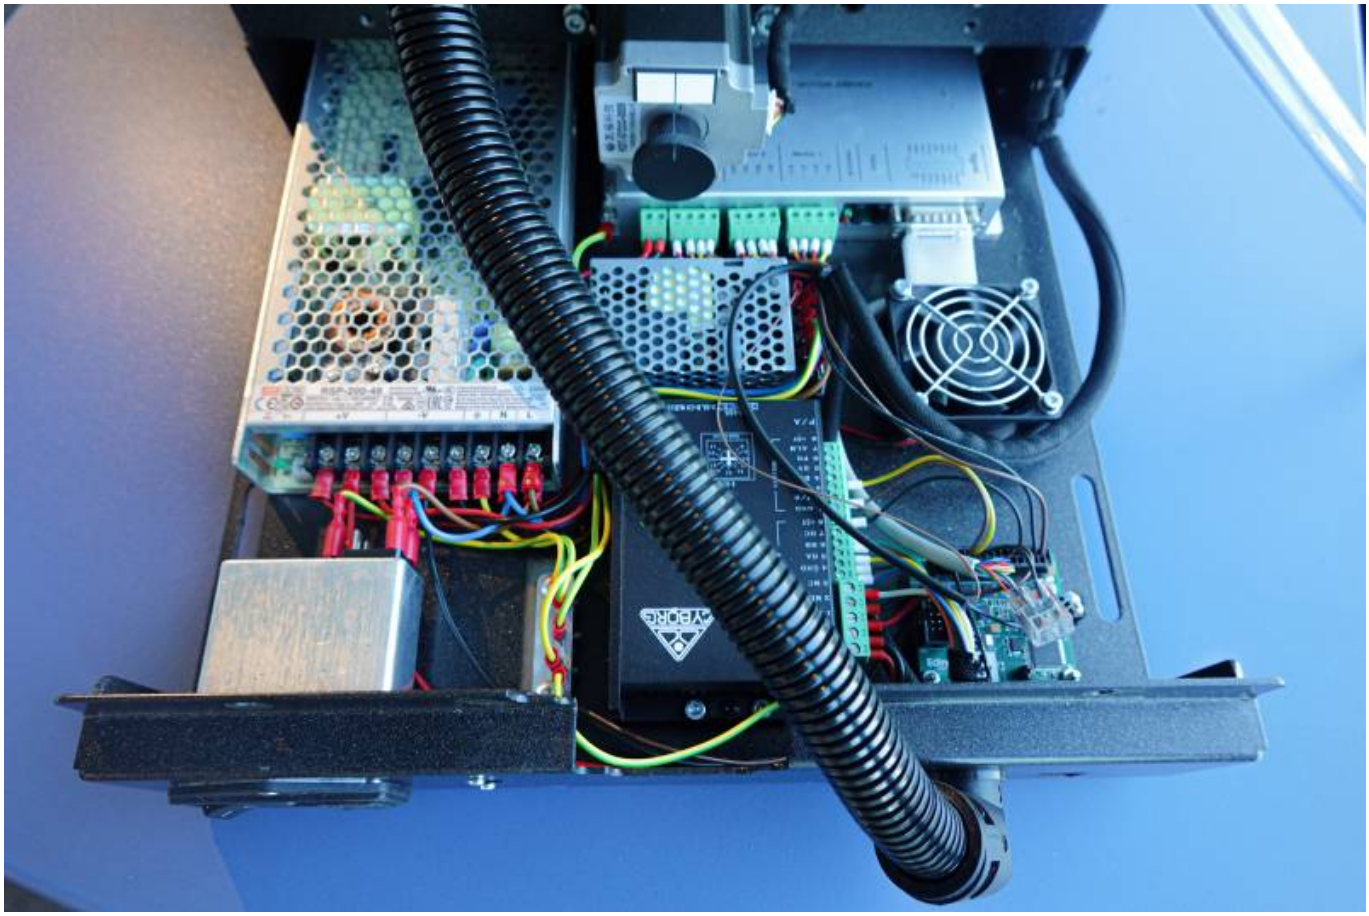

Finally you can pull the drawer out as far as needed.

When pushing the drawer back inside the machine chassis, pay attention to the wire harness on the right.
Make sure nothing obstructs this harness.

Continue to greasing the leadscrews.
Continue to the table of contents.

From:
https://manuals.cyborg-engravers.com/ - **cyborg-engravers**

Permanent link:
https://manuals.cyborg-engravers.com/doku.php?id=en:x200:machine_opening_the_drawer&rev=1745418162

Last update: **2025/04/23 16:22**